

Canon

TX-20

Full Auto Tonometer



**From Start to Print,
Speedy IOP Measurements in Both Eyes**

**Full Auto
Non-Contact Tonometer**



**In a compact body, a variety of new features.
An easy-to-operate,
fully automatic non-contact tonometer.**




Canon has been a world leader in helping eye care professionals detect and monitor eye care disorders, such as glaucoma and ocular hypertension, with devices for intraocular pressure (IOP) measurements in both eyes, and now they are revolutionizing once again with the TX-20. This new generation of tonometer is fully automatic and non-contact, so measurements can easily be done in a patient-friendlier way. The compact size, light weight, and tilting LCD monitor also improves the usability for the examiner.

TX-20
Full Auto Tonometer



START

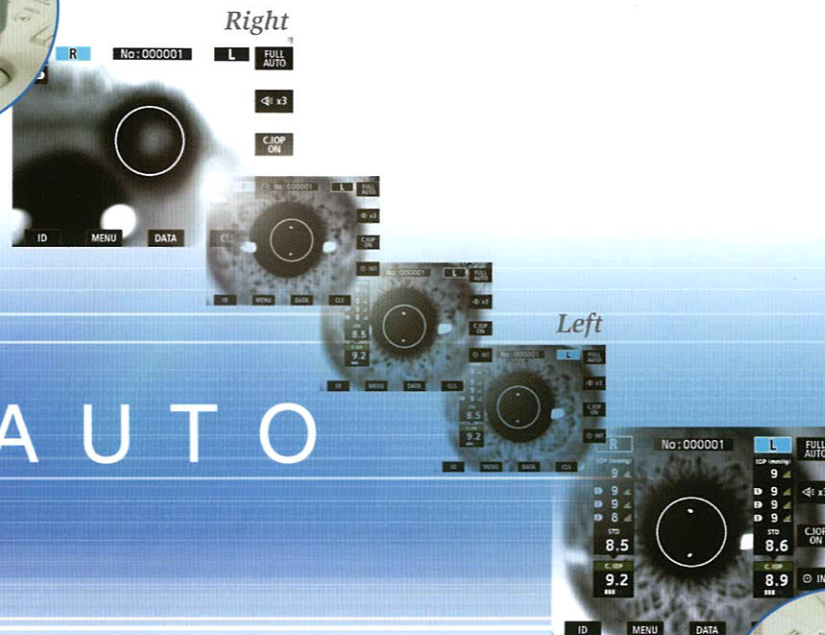

FULL AUTO



PRINT



■ 3-D Auto Alignment

In Full Auto mode, just one push of the Measurement Start button quickly and easily acquires both right and left eye intraocular pressure (IOP) measurements and automatically prints out the results. In addition to Full Auto measurement mode, Auto & Manual modes are also available as needed.

■ New design pursuing comfort

Full Auto, with its simple operation, can be used to smoothly obtain measurements from the first time. Also, the color LCD viewing monitor tilts to be viewable by the examiner even while standing, further simplifying testing.

■ Lightweight & compact, with low power consumption

With a body weight of only 15kg, the device is light and easily transportable. The compact size allows for versatile placement where best appropriate. Also, TX-20 has low power consumption, adding to its all-around convenience.

A variety of new and improved usa

Tiltable color LCD monitor, multi-function switches, and motor

IOP measurement of both right and left eyes with one touch.

Using the motorized joystick, roughly position the patient's pupil within the wide field of view, and then press the Measurement Start button to begin (during Full Auto mode).


Tiltable color LCD monitor

The examiner can angle the 5.7-inch color LCD monitor to view at up to approximately a 40° total angle. Measure from any position with ease.




Equipped with internal and external fixation lamps

In addition to the internal fixation lamp, TX-20 is also equipped with an external fixation lamp, effective for examinees with central vision defects. Easily switchable between the external and internal fixations lamps as necessary.

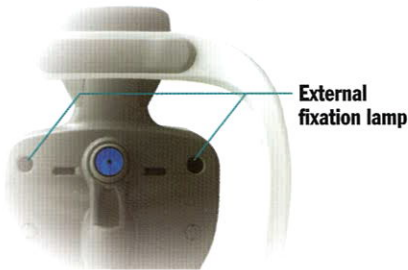

External fixation lamp

R/L button Limiter button Check button

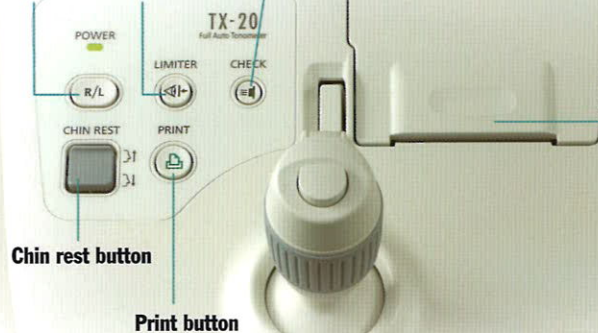

Chin rest button

Print button

Auto Cut Printout

Added to the TX-20 body is a front-loaded printer featuring an auto cutter function. Paper output in the front makes results simpler to get, and faster printing shortens the total measurement time.



ability features.


zed joystick for easy use.

TX-20 Full Auto Tonometer



Multi-function switches

Buttons for selecting necessary operational functions during an examination are conveniently located along the monitor, adjacent to their corresponding section on the display screen.

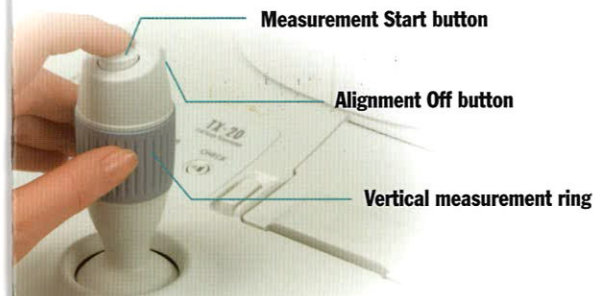


Motorized joystick

A motorized joystick combines various features to make measurements easier to acquire.

Simple & clear monitor

IOP correction ON/OFF switch

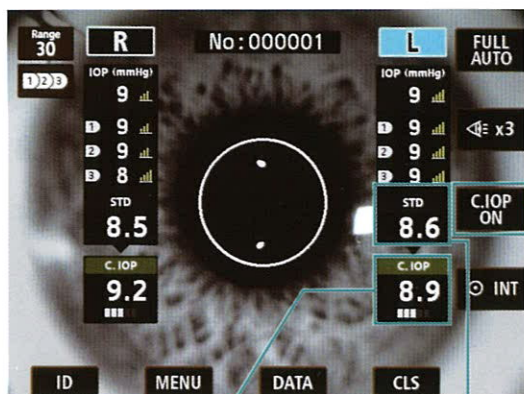


IOP compensated value

IOP standard value

Equipped for extensive external interfacing

Easy integration of external systems such as RS-232C, USB, and LAN connection.

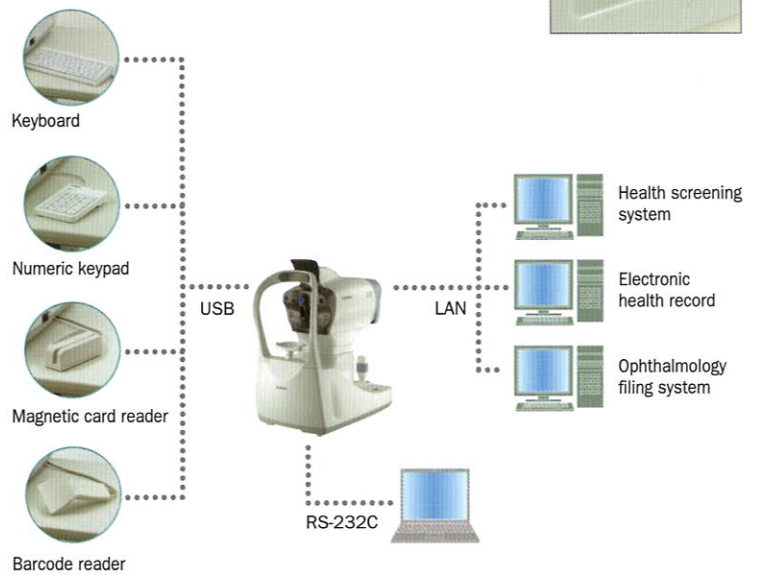

TX-20 Specifications

Type	Non-contact tonometer
Measurable range	0 to 60mmHg Includes automatic shifting between 30 / 60mmHg
Measuring increment	1mmHg
Operation distance	11 mm from the front of nozzle
Alignment	Full Auto / Auto / Manual
Memory	Max. 10 measurements for each eye
Data output	RS232C, USB, LAN
Power-saving system	5min. / 10min. / 15min. / OFF (4 levels selectable)
Display	Tiltable 5.7-inch color TFT LCD monitor
Printer	Thermal line printer with auto cutter
Power supply	AC100 - 240V, 50 / 60Hz, 0.4 - 0.8A
Operating range	Left / right: 90mm Up / down: 30mm
Dimensions (W x D x H)	260 x 490 x 500 mm (10.2 x 19.3 x 19.7 in.)
Weight	15 kg (33 lbs.)

COMPONENTS

Main unit 1
Nozzle cap 1
Chin rest paper 100 sheets
Printing paper 2 rolls
Power cable 1
Dust cover 1

OPTIONAL ACCESSORIES

Chin rest papers (500 sheets)
Printing paper

Simulated images and specifications are subject to change without notice.



CANON INC. MEDICAL EQUIPMENT GROUP

30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo 146-8501, Japan
Telephone: +81-3-3757-8497 Fax: +81-3-5482-3960

CANON (CHINA) CO, LTD. Medical System Division

15F Jinbao Building No.89 Jinbao Street, Dongcheng District,
Beijing 100005, China
Telephone: (86) 10-8513-9999 Fax: (86) 10-8513-9914
<http://www.canon.com.cn>

CANON SINGAPORE PTE. LTD. Medical Equipment Dept.

1 HarbourFront Avenue, #04-01 Keppel Bay Tower, Singapore 098632
Telephone: +65-6796-3549 Fax: +65-6271-4226
<http://www.canon-asia.com>

CANON KOREA BUSINESS SOLUTIONS INC.

MEDICAL EQUIPMENT BUSINESS TEAM
#168-12, Samseong-dong, Gangnam-gu, Seoul, Korea
Telephone : +82-2-3450-0727 Fax : +82-2-3456-0655
<http://www.canon-bs.co.kr>

CANON AUSTRALIA PTY. LTD. Optical Division

1 Thomas Holt Drive, North Ryde, Sydney, NSW 2113, Australia
Telephone: +61-2-9805-2000 Fax: +61-2-9805-2444
<http://www.canon.com.au/default.aspx>